



	Gewicht Weight [kg]	Massentraegheitsmoment Mass moment of inertia [kgm ²]
Nabe Hub	17.211	0.141956
Elastomerring Elastomer ring	0.610	0.006058
Komplette Kupplung Complete coupling	35.100	0.290479

Drehmoment / Torque
Elastomerring / elastomer ring
NBR 78 Shore A
T_{KN} = 3900 Nm
T_{Kmax} = 7800 Nm

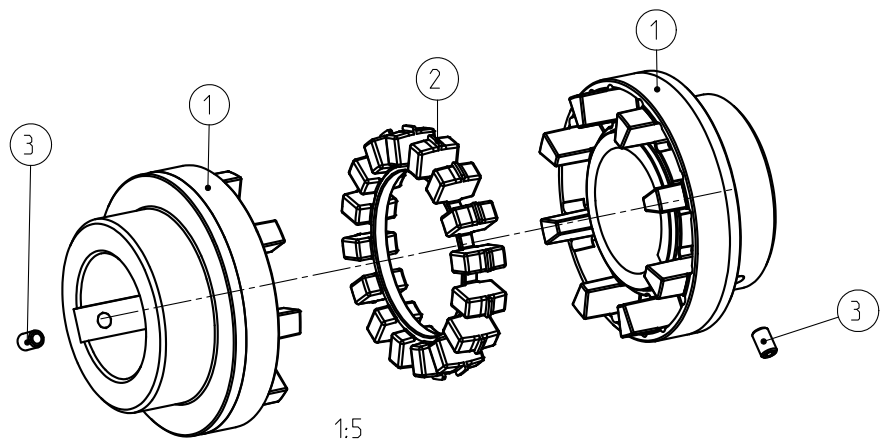

Oberflaechenguete nach DIN ISO 1302 Reihe 2 Surface quality acc. to DIN ISO 1302 line 2		Schutzvermerk ISO 16016 beachten Note protection mark acc. to ISO 16016			
Allgemeintoleranzen nach DIN ISO 2768 - General tolerances acc. to DIN ISO 2768-		Masstab Scale	1:2	Format DIN Size	A3
POLY-NORM 110 Ø120 Ø120 Bauart AR				 KTR-Kupplungstechnik GmbH D-48407 Rheine	
gezeichnet drawn	Werkstoff Material	Teilnummer Part number	Kz	Lfd.-Nr. Current number	Index Change
Datum 10.10.11	DIN		M	427073	2
Name LUH	Gewicht Weight	35.100			