
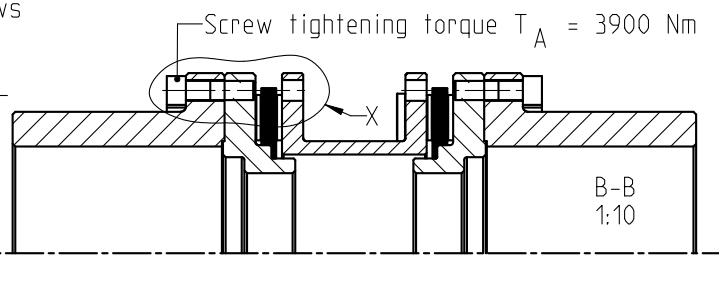



8x holes / threads for restoring screws



Oberflächengüte nach DIN ISO 1302 Reihe 2 Surface quality acc. to DIN ISO 1302 line 2		Schutzvermerk ISO 16016 beachten Note protection mark acc. to ISO 16016	
Allgemeintoleranzen nach DIN ISO 2768 - mH General tolerances acc. to DIN ISO 2768 - mH		Masstab Scale	3:20
		Format DIN Size	A3
<b>RIGIFLEX-N 408</b> A		 <b>KTR-Kupplungstechnik GmbH</b> D-48407 Rheine	
gezeichnet drawn	Werkstoff Material	Teilnummer Part number	Kz
Datum 08.11.10	DIN		Lfd.-Nr. Current number
Name SO	Gewicht Weight	1311.731	Index Change
			M
			464456
			2

Permissible misalignments (max. figures may not occur simultaneously)			Coupling data	
Angular (each lamina)	Axial	Radial	Nominal torque $T_{KN}$	280.000 Nm
0,5°	5,0 mm	2,80 mm	Maximum torque $T_{Kmax}$	560.000 Nm