


Drehmomente / Torques (Nm)		
1TF	2TF	3TF
400 - 800	800 - 1600	1400 - 2100



Oberflächengüte nach DIN EN ISO 1302 Reihe 2 Surface quality acc. to DIN EN ISO 1302 line 2		Schutzvermerk ISO 16016 beachten Note protection mark acc. to ISO 16016	
Allgemeintoleranzen nach General tolerances acc. to		DIN ISO 2768 - mH	Masstab Scale
		3:4	Format Size
		A3	
<b>RUFLEX 5-XTF-65 (max.) Without Driven Part</b>		<b>RUFLEX 5-XTF-65 (max.) ohne Antriebsteil</b>	
gezeichnet drawn	Werkstoff Material	Kz	Lfd.-Nr. Current number
Datum Date	17.03.16	Norm Standard	Index Rev.
Name	FE	Gewicht Weight	12.545 kg
		M	660179
			0

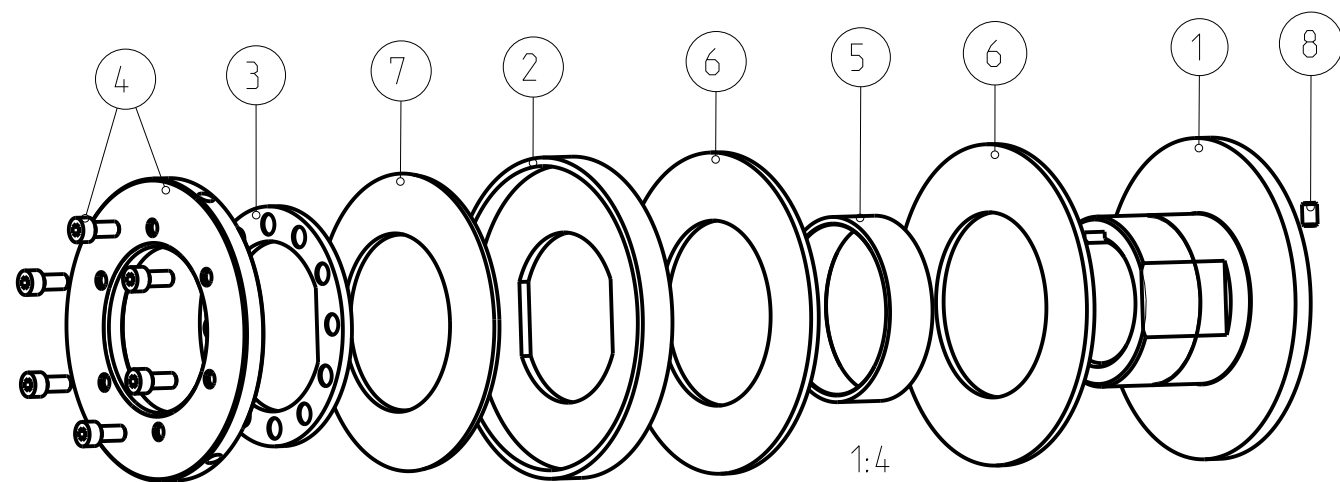