

 KTR-N
 45510 EN

 Sheet:
 1 of 41


 Edition:
 24




Torsionally flexible jaw-type couplings

shaft coupling, clamping hubs, Compact, clamping ring hubs light, clamping ring hubs, DKM and their combinations


according to directive 2014/34/EU and UK directive SI 2016 No. 1107




ROTEX[®] GS, shaft coupling




ROTEX[®] GS, clamping hubs



ROTEX[®] GS, Compact



ROTEX[®] GS, clamping ring hubs light ROTEX[®] GS, clamping ring hubs steel ROTEX[®] GS, clamping ring hubs

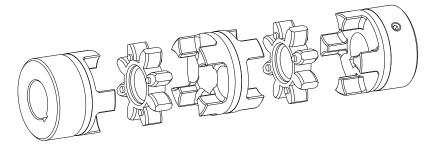

ROTEX[®] GS, DKM

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing: KTR-N dated 2020-02-10				
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:				



ROTEX[®] **GS** is a plug-in shaft coupling for measuring technology and automatic control engineering. It is able to compensate for shaft misalignment, for example caused by manufacturing inaccuracies, thermal expansion, etc.

Table of contents

1	Technical data	4
	 Types of hubs Torques and finish bores Coupling dimensions 	4 5 6
2	Advice	17
	 2.1 General advice 2.2 Safety and advice symbols 2.3 General hazard warnings 2.4 Intended use 2.5 Coupling selection 2.6 Reference to EC Machinery Directive 2006/42/EC 	17 18 18 18 19 19
3	Storage, transport and packaging	19
	3.1 Storage3.2 Transport and packaging	19 19
4	Assembly	20
	 4.1 Components of the coupling 4.2 Advice for assembly 4.3 Advice for finish bore 4.4 Assembly of the coupling (general) 4.5 Assembly of the hubs (hub type 1.0, 1.1 and 1.2) 4.6 Assembly of the clamping hubs (hub types 2.0, 2.1, 2.5, 2.6, 2.8) 4.7 Assembly of clamping ring hubs (hub type 6.0 light, 6.0 steel and 4.8 Disassembly of clamping ring hubs (hub type 6.0 light, 6.0 steel and 4.9 Displacements - alignment of the couplings 	16.0) 25
5	Start-up	29
6	Breakdowns, causes and elimination	30
7	Disposal	32
8	Maintenance and service	33
9	Spares inventory, customer service addresses	33

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	


K	KTR-Group	ROTEX [®] GS Operating/Assembly instructions	KTR-N Sheet: Edition:	45510 EN 3 of 41 24							
Tab	le of contents										
10 Enclosure A											
Advice and instructions regarding the use in <i>by</i> potentially explosive atmospheres 34											
		in Ex potentially explosive atmospheres			35						
	10.2 Inspection int 10.3 Standard value	ervals for couplings in <i>(Ex)</i> potentially explosive ues of wear	e atmosphere	es	36 37						
	10.4 (Ex) markin 10.5 EU Certificate 10.6 UK Declarate		es		38 40 41						


Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



1 Technical data

1.1 Types of hubs

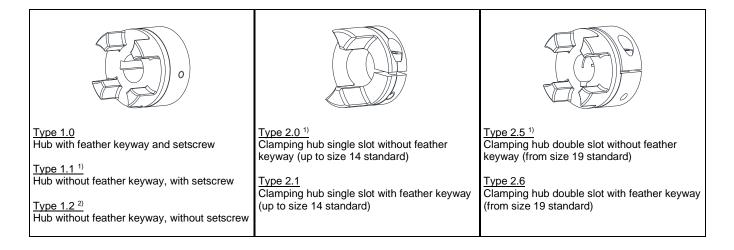

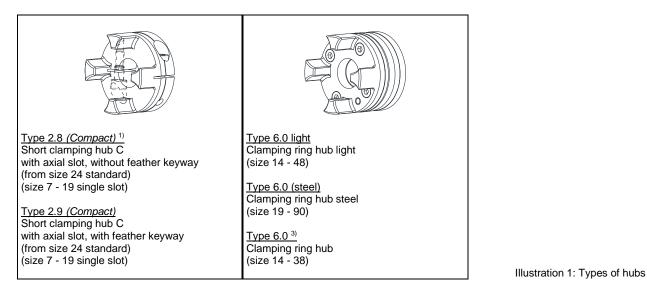

Hubs, clamping hubs or similar types without feather keyway may be used in category 3 only and are marked with category 3 accordingly.

Hub type 1.2 is not approved for potentially explosive atmospheres!

3) Hub material - aluminium (AI-H); clamping ring material - steel

1)

2

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



1 Technical data

1.2 Torques and finish bores

Table 1: Torques of spiders

Size		Spider ¹⁾ (component 2) Rated torque [Nm]											
	80 ShA-GS	92 ShA-GS	98 ShA-GS	64 ShD-GS	72 ShD-GS 2)								
5	0.3	0.5	0.9	-	-								
7	0.7	1.2	2.0	2.4	-								
8	0.7	-	2.0	2.4	-								
9	1.8	3.0	5.0	6.0	-								
12	3.0	5.0	9.0	12.0	-								
13	3.6	-	11.0	14.5	-								
14	4.0	7.5	12.5	16.0	-								
16	5.0	-	15.0	19.0	-								
19	6	12	21	26	-								
24	-	35	60	75	97								
28	-	95	160	200	260								
38	-	190	325	405	525								
42	-	265	450	560	728								
48	-	310	525	655	852								
55	-	410	685	825	1072								
65	-	-	940	1175	1527								
75	-	-	1920	2400	3120								
90	-	-	3600	4500	5850								

1) Maximum torque of the coupling $T_{Kmax.}$ = rated torque of the coupling $T_{KN} x 2$ For coupling selection see catalogue drive technology "ROTEX® GS"

2) When using the spider 72 ShD, we recommend to use hubs made of steel.

							Finish b	ore [mm]					
Size	Unbored	d _{min.}					f	d _{max.} or hub typ	е				
			1.0	1.1	1.2	2.0	2.1	2.5	2.6	2.8	2.9	6.0 light	6.0
5	-	2	-	6	5	5	-	-	-	-	-	-	-
7	-	3	7	7	7	7	7	-	-	7	7	-	-
8	-	-	-	-	-	-	-	-	-	8	8	-	-
9	-	4	10	11	11	11	11	-	-	9	9	-	-
12	-	4	12	12	12	12	12	-	-	12	12	-	-
13	-	-	-	-	-	-	-	-	-	12.7	12.7	-	-
14	-	5	16	16	16	16	16	-	-	16	16	14	-
16	-	-	-	-	-	-	-	-	-	16	16	-	-
19	х	6	24	-	-	-	-	24	24	27	27	20	20
24	х	8	28	-	-	-	-	28	28	32	32	32	28
28	х	10	38	-	-	-	-	38	38	35	35	38	38
38	х	12	45	-	-	-	-	45	45	45	45	48	48
42	х	14	55	-	-	-	-	50	45	-	-	51	51
48	х	15	62	-	-	-	-	55	55	-	-	55	55
55	х	20	74	-	-	-	-	68	68	-	-		70
65	х	22	80	-	-	-	-	70	70	-	-		70
75	х	30	95	-	-	-	-	80	80	-	-		80
90	-	40	110	-	-	-	-	90	90	-	-		105

Table 2: Finish bores


Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



1 Technical data

1.3 Coupling dimensions

Standard shaft coupling

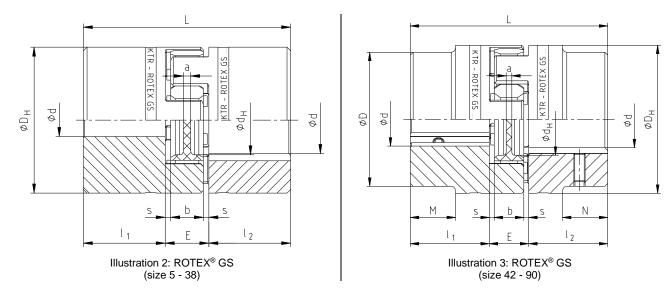



Please refer to table 1 for torques and table 2 for finish bores.

Size					Dimensi	ons [mm]					Setscrew DIN EN ISO 4029	
	D	D _H	d _H	L	l ₁ , l ₂	M, N	E	b	S	а	G	t
					Hub ma	terial - alur	ninium					
5	-	- 10 - 15 5 - 5 4 0.5 4.0 M2 2.5									2.5	
7	-	14	-	22	7	-	8	6	1.0	6.0	M3	3.5
9	-	20	7.2	30	10	-	10	8	1.0	1.5	M4	5.0
12	-	25	8.5	34	11	-	12	10	1.0	3.5	M4	5.0
14	-	30	10.5	35	11	-	13	10	1.5	2.0	M4	5.0
19	-	40	18	66	25	-	16	12	2.0	3.0	M5	10
24	-	55	27	78	30	-	18	14	2.0	3.0	M5	10
28	-	65	30	90	35	-	20	15	2.5	4.0	M8	15
38	-	80	38	114	45	-	24	18	3.0	4.0	M8	15
					Hub ı	material - s	steel					
42	85	95	46	126	50	28	26	20	3.0	4.0	M8	20
48	95	105	51	140	56	32	28	21	3.5	4.0	M8	20
55	110	120	60	160	65	37	30	22	4.0	4.5	M10	20
65	115	135	68	185	75	47	35	26	4.5	4.5	M10	20
75	135	160	80	210	85	53	40	30	5.0	5.0	M10	25
90	160	200	104	245	100	62	45	34	5.5	6.5	M12	30

Table 3: Dimensions - Standard shaft coupling

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	




ROTEX® GS Operating/Assembly instructions

Technical data 1

Coupling dimensions 1.3

Clamping hubs

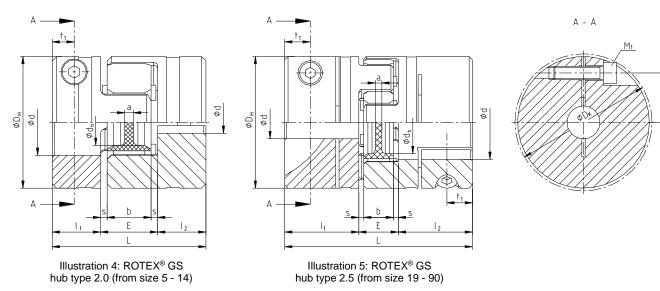



Please refer to table 1 for torques and table 2 for finish bores.

Size				C	Dimensio	ns ³⁾ [mn	ר]				Clamping screw DIN EN ISO 4029 (ROTEX [®] GS 5 - DIN EN ISO 1207)				
Size	D	D _H	dн	L	I_1, I_2	M, N	Е	b	s	а	M ₁	t ₁	е	DK	T _A [Nm]
Hub material - aluminium															
5	-	10	-	15	5	-	5	4	0.5	4.0	M1.2	2.5	3.5	11.4	_ 1)
7	-	14	-	22	7	-	8	6	1.0	6.0	M2	3.5	5.0	16.5	0.37
9	-	20	7.2	30	10	-	10	8	1.0	1.5	M2.5	5.0	7.5	23.4	0.76
12	-	25	8.5	34	11	-	12	10	1.0	3.5	M3	5.0	9.0	27.5	1.34
14	-	30	10.5	35	11	-	13	10	1.5	2.0	M3	5.0	11.5	32.2	1.34
19	-	40	18	66	25	-	16	12	2.0	3.0	M6 ²⁾	11.0	14.5 ²⁾	46.0	10.5 ²⁾
24	-	55	27	78	30	-	18	14	2.0	3.0	M6	10.5	20.0	57.5	10.5
28	-	65	30	90	35	-	20	15	2.5	4.0	M8	11.5	25.0	73.0	25
38	-	80	38	114	45	-	24	18	3.0	4.0	M8	15.5	30.0	83.5	25
						Hub	material	l - steel							
42	85	95	46	126	50	28	26	20	3.0	4.0	M10	18	32.0	93.5	69
48	95	105	51	140	56	32	28	21	3.5	4.0	M12	21	36.0	105.0	120
55	110	120	60	160	65	37	30	22	4.0	4.5	M12	26	42.5	119.5	120
65	115	135	68	185	75	47	35	26	4.5	4.5	M12	33	45.0	124.0	120
75	135	160	80	210	85	53	40	30	5.0	5.0	M16	36	51.0	147.5	295
90	160	200	104	245	100	62	45	34	5.5	6.5	M20	40	60.0	176.0	580

Table 4: Dimensions - clamping hubs

1)

Slotted screw, tightening torque not defined Size 19: Bore \emptyset 22 - \emptyset 24 with 2-off clamping screws M4, T_A = 2.9 Nm and dimension e = 15.0 Size 19: Bore Ø22 - Ø24 with 2-off clamping screws M4, T_A
 Transmittable friction torques of clamping hubs see table 5

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



1 Technical data

1.3 Coupling dimensions

Table 5: Friction torques and surface pressure of clamping hubs (hub type 2.0 and 2.5)

Size	5	7	9	12	14	19	24	28	38	42	48	55	65	75	9
Bore Ø					Trans	mittable	friction t	orque T _F	R of clam	ping hub) [Nm]				
DOIC D		1	1			:	surface	oressure	[N/mm ²]					
Ø2	-	1													
	-	0.7													
Ø3		90													
~ 1	-	0.9	1.6	2.4											
Ø4		65	82	113											
Ø5	-	1.1	1.9	2.9	3.1										
05		51	64	88	93										
Ø6		1.2	2.2	3.4	3.6										
20	-	41	52	72	76										
Ø7		1.4	2.6	3.9	4.2										
	-	34	44 2.9	61	64	10									
Ø8			2.9 38	4.4 53	4.7 56	19 142									
	-		3.2	4.9	5.2	21									
Ø9		1	33	46	49	125									
<i>α</i> 40	1	1	3.5	5.4	5.7	23	24	1	1	1	1	1		1	
Ø10			29	41	43	111	98								
Ø11			3.8	5.8	6.2	25	26								
			26	37	39	100	88								
Ø12				6.3	6.7	27	28								
012	-			33	35	91	80								
Ø14					7.6	31	33	63							
	-				29	76	68 35	116	07						
Ø15					8.0 27	33 70	63	67 108	67 80						
					8.5	35	37	71	71						
Ø16	-		1		25	65	58	100	75						
~					20	39	41	79	79						
Ø18						57	51	88	66						
Ø19						41	43	82	83	188					
019						54	48	83	62	129					
Ø20						42	45	86	87	197					
020						51	45	78	59	122					
Ø22							48	94	95	214					
~==	_						41	70	53	110					
Ø24		<u> </u>	<u> </u>				52	101	102 48	231					
							37 54	63 105	48	100 240	356				
Ø25							35	61	46	240 95	130				
~~~	1	1	1				59	115	117	264	394				
Ø28							31	53	40	84	115				
<i>a</i> 20	1							122	124	281	418				
Ø30								49	37	78	106				
Ø32								129	131	297	442	456			
0.02								46	34	72	99	84			
Ø35								139	142	320	478	493	499		
~~~								41	31	65	89	76	64		
Ø38								148	152	343	513	529	536		
		<u> </u>	<u> </u>					37	28	59	81	69	58		
Ø40									158	358	536	553	560		
		<u> </u>							27 165	56 373	76 558	65 577	55 584	1107	17
Ø42									25	53	72	62	52	89	1
~	1								175	395	592	611	620	1175	18
Ø45	l	t	1						23	49	67	57	48	82	10

* Hub type 2.0 only



Clamping hubs without feather keyway may be used in category 3 <u>only</u> and are marked with category 3 accordingly.

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



1 Technical data

1.3 Coupling dimensions

Table 5 continued: Friction torques and surface pressure of clamping hubs (hub type 2.0 and 2.5)

Size	5	7	9	12	14	19	24	28	38	42	48	55	65	75	90
Bore Ø					Trans			orque T _r pressure			o [Nm]				
Ø48										417	624	646	655	1242	1985
Ø40										45	62	53	45	76	100
Ø50										431	646	668	677	1287	2057
200										43	59	51	43	73	95
Ø55											699	724	734	1396	2235
											53	45	38	65	86
Ø60												778	789	1503	2409
												41 830	34	59	77
Ø65			-									37	842 31	1607 54	2579 71
												882	895	1709	2746
Ø70												34	29	49	65
												04	946	1810	2911
Ø75													26	45	60
~ ~~~													-	1908	3072
Ø80														42	56
Ø85														2005	3231
600														39	52
Ø90															3387
290															48



Clamping hubs without feather keyway may be used in category 3 <u>only</u> and are marked with category 3 accordingly.

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



ROTEX® GS Operating/Assembly instructions

Technical data

Coupling dimensions 1.3

Compact

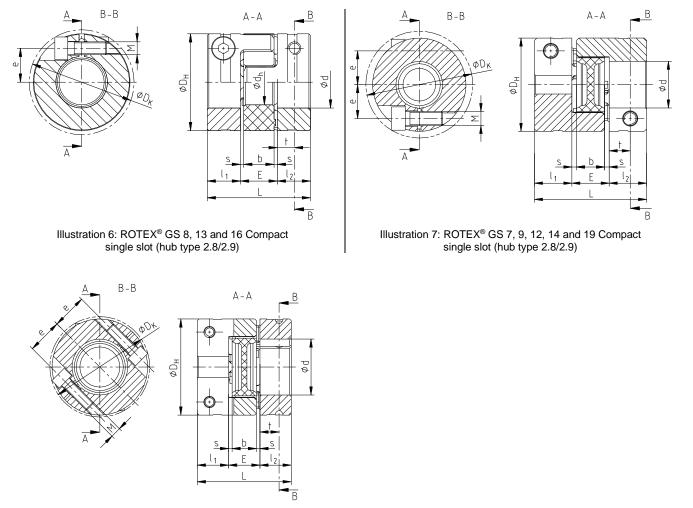


Illustration 8: ROTEX® GS 24 to 38 Compact axial slot (hub type 2.8/2.9)



Please refer to table 1 for torgues and table 2 for finish bores.

Table 6: Dimensions - Compact

Size				Dimensio	ns ³⁾ [mm]				Clamp	ing screw I	DIN EN IS	O 4762
Size	D _H	DK	L	$ _{1}, _{2}$	Е	b	s	d _h	t	е	М	T _A [Nm]
7	14	16.6	18	5	8	6	1	-	2.5	5.0	M2	0.37
8	15	17.3	20	7	6	5	0.5	6.2	4.0	5.4	M2	0.52
9	20	21.3	24	7	10	8	1	-	3.5	6.7	M2.5	0.76
12	25	26.2	26	7	12	10	1	-	3.5	8.3	M3	1.34
13	25	25.7	26	8	10	8	1	10	4.0	8.0	M3	1.9
14	30	31.6 ¹⁾	32	9.5	13	10	1.5	-	4.5	10.0 ¹⁾	M4 ¹⁾	2.9 ¹⁾
16	30	-	32	10.3	11.4	9.4	1	14	5.3	10.5	M4	4.1
19	40	45.5 ²⁾	50	17	16	12	2	-	9.0	14.0 ²⁾	M6 ²⁾	10 ²⁾
24	55	57.5	54	18	18	14	2	-	11.0	20.0	M6	10
28	65	69.0	62	21	20	15	2.5	-	12.0	23.8	M8	25
38	80	86.0	76	26	24	18	3	-	15.0	29.5	M10	49

1) Bores from Ø14 with clamping screw M3, $T_A = 1.34$ Nm, dimension e = 10.4 and dimension $D_K = 30.5$ 2) Bores from Ø21 with clamping screw M5, $T_A = 6$ Nm, dimension e = 15.5 and dimension $D_K = 47.0$

Transmittable friction torques of type Compact see table 7

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	

²⁾ 3)



1 Technical data

1.3 Coupling dimensions

Table 7: Friction torques and surface pressure of type Compact (hub type 2.8 and 2.9)

Sizo	7	0	0	10	10	14	16	10	24	20	20
Size	/	8	9 T	12 Transmittak	13	14 torqua T	16 of clampir	19	24	28	38
Bore Ø			<u>-</u>	ransmilla		pressure		ig nub [ivi	<u>nj</u>		
	0.8	0.65			Jundoo	pressure	[1,1,1,1,1,1,1,1,1,1,1,1,1,1,1,1,1,1,1,				
Ø3	173.5	86.4									
Ø4	0.9	0.85	1.9	3.4	2.2						
Ø4	105.1	64.8	151.6	273.6	145.8						
Ø5	1.0	1.1	2.0	3.6	2.75	7.1	4.8				
~~~	72.1	51.9	102.6	183.6	116.6	262.2	158.7				
Ø6	1.0	1.3	2.1	3.7	3.3	7.4	5.8				
	53.4 1.1	43.2 1.5	75.1 2.2	133.4 3.9	97.2 3.8	189.6 7.7	132.3 6.4				
Ø7	41.7	37.0	58	102.3	83.3	144.8	113.4				
	41.7	1.7	2.3	4.1	4.4	8.0	7.7	24.3			
Ø8		32.4	46.6	81.7	72.9	115.1	99.2	191.8			
<b>60</b>			2.4	4.2	4.9	8.2	8.7	25.0			
Ø9			38.6	67.2	64.8	94.3	88.2	155.7			
Ø10				4.4	5.5	8.5	9.6	25.7	21.2		
~ 10				56.5	58.3	79.1	79.4	129.5	82.3		
Ø11				4.6	6.0	8.8	10.5	26.3	23.3		
				48.5	53.0	67.6 9.1	72.2 11.6	109.9 27.0	74.8 25.4		
Ø12				4.7 42.2	6.6 48.6	9.1 58.7	66.1	94.7	25.4 68.6		
				42.2	40.0	5.8	13.5	28.4	29.7	54.4	
Ø14						27.2	56.7	73.1	58.8	92.0	
						5.9	14.5	29.0	31.8	58.3	92.6
Ø15						24.4	52.9	65.2	54.9	85.9	109.6
Ø16						6.1	15.4	29.7	33.9	62.2	98.8
010						22.1	49.6	58.6	51.4	80.5	102.7
Ø18								31.1	38.2	70.0	111.1
~ 10								48.4	45.7	71.5	91.3
Ø19								31.7	40.3	73.9	117.3
								44.4	43.3	67.8	86.5
Ø20								32.4 40.9	42.4 41.1	77.8 64.4	123.5 82.2
								25.4	46.7	85.5	135.8
Ø22								26.5	37.4	58.5	74.7
~~ .								26.4	50.9	93.3	148.2
Ø24								23.1	34.3	53.7	68.5
Ø25									53.0	97.2	154.3
									32.9	51.5	65.8
Ø28	L								59.4	108.9	172.9
									29.4	46.0	58.7
Ø30									63.6	116.6	185.2
	ł								27.4 67.9	42.9 124.4	54.8 197.5
Ø32									25.7	40.2	51.4
~	1								20.7	136.1	216.1
Ø35			1		1		1		1	36.8	47.0
Ø29											234.6
Ø38											43.3
Ø40											246.9
240	ļ										41.1
Ø42											259.3
	ļ										39.1
Ø45											277.8
	I										36.5

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



#### Technical data

#### **Coupling dimensions** 1.3

#### Clamping ring hubs 6.0 light, 6.0 steel and 6.0




Illustration 9: ROTEX® GS, clamping ring hubs

Extraction thread M1 between clamping screws.

Clamping ring hub 6.0 light with block mounting (hub and clamping ring mounted as a block)

1) From Ø55 tolerance G7/m6



Please refer to table 1 for torques and table 2 for finish bores.

0:				Dime	ensions ⁴⁾	[mm]				Clampi	ng screws	DIN EN IS	O 4762
Size	D _H ²⁾	d _H	L	$ _{1},  _{2}$	l ₃	Ē	b	S	а	М	Z ³⁾	T _A [Nm]	$M_1$
	6.0 light (	(size 14 -	48)			amping rir							
	6.0 (size	14 - 38)		Hub ma	terial - alu	minium/cl	amping ri	ng materia	al - steel				
14	30	10.5	50	18.5	13.5	13	10	1.5	2.0	M3	4	1.34	M3
19	40	18	66	25	18	16	12	2.0	3.0	M4	6	3	M4
24	55	27	78	30	22	18	14	2.0	3.0	M5	4	6	M5
28	65	30	90	35	27	20	15	2.5	4.0	M5	8	6	M5
38	80	38	114	45	35	24	18	3.0	4.0	M6	8	10	M6
42	95	46	126	50	35	26	20	3.0	4.0	M8	4	25	M8
48	105	51	140	56	41	28	21	3.5	4.0	M10	4	49	M10
	6.0 steel	(size 19 -	90)	Material	of hub ar	nd clampir	ng ring - st	teel					
19	40	18	66	25	18	16	12	2.0	3.0	M4	6	4.1	M4
24	55	27	78	30	22	18	14	2.0	3.0	M5	4	8.5	M5
28	65	30	90	35	27	20	15	2.5	4.0	M5	8	8.5	M5
38	80	38	114	45	35	24	18	3.0	4.0	M6	8	14	M6
-	80 95			45 50	35 35	24 26	18 20	3.0 3.0	4.0 4.0	M6 M8	8 4	14 41	M6 M8
38		38	114						-	-	-		
38 42	95	38 46	114 126	50	35	26	20	3.0	4.0	M8	4	41	M8
38 42 48	95 105	38 46 51	114 126 140	50 56	35 41	26 28	20 21	3.0 3.5	4.0 4.0	M8 M10	4	41 69	M8 M10
38 42 48 55	95 105 120	38 46 51 60	114 126 140 160	50 56 65	35 41 45	26 28 30	20 21 22	3.0 3.5 4.0	4.0 4.0 4.5	M8 M10 M10	4 4 4	41 69 69	M8 M10 M10

#### Table 8: Dimensions - Clamping ring hubs 6.0 light, 6.0 steel and 6.0

2) Ø  $D_H$  + 2 mm with high speeds for expansion of spider 3) z = Number each clamping ring hub

4) Consider transmittable friction torques of the respective clamping ring hubs 6.0 light, 6.0 steel and 6.0 (see table 9 to 11)

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



1 Technical data

#### 1.3 Coupling dimensions

#### Table 9: Friction torque and surface pressure of clamping ring hubs 6.0 light

S	ize	1	4	1	9		24		28		38		2	2	18
-					Tra	insmitta	ble friction				ng hub [N	<u>[m]</u>			
Во	re Ø	Niss	N1/2	Nim	N1/2	Nim			sure [N/n		N1/2	Nim	N1/2	Nim	N1/2
	H7/k6	Nm 8.2	N/mm ² 194	Nm	N/mm ²	Nm	N/mm ²	Nm	N/mm ²	Nm	N/mm ²	Nm	N/mm ²	Nm	N/mm ²
Ø6	H7/h6	5.8	194						-						-
	H7/k6	13.1	176												
Ø8	H7/h6	9.5	147												
	H7/k6	18.7	147												
Ø9	H7/h6	15.7	147												
	H7/k6	20.5	147	33	178										-
Ø10	H7/h6	16.6	135	27	178										-
	H7/k6	25.9	155	41	174									-	
Ø11	H7/h6	21.6	134	35	156									-	
	H7/k6	36.2	121	59	150	84	179							-	
Ø14	H7/h6	24.7	121	52	132	75	164						1		+
	H7/k6	2-7.1		71	147	99	173						1		+
Ø15	H7/h6			65	147	92	163								
	H7/k6			51	121	93	166	140	184						
Ø16	H7/h6			39	103	79	147	121	165						
	H7/k6			80	114	139	157	207	175						
Ø19	H7/h6			68	102	125	144	187	162						-
	H7/k6			92	111	157	153	188	164	290	184				
Ø20	H7/h6			81	101	145	143	157	144	247	164				-
	H7/k6			01	101	160	126	289	152	439	172				
Ø24	H7/h6					119	115	263	141	403	160				
	H7/k6					177	123	316	149	480	169				
Ø25	H7/h6					136	114	293	140	447	159				
	H7/k6					232	116	355	134	567	158	651	169	765	173
Ø28	H7/h6					190	111	318	125	530	149	574	160	678	164
	H7/k6							414	130	656	153	752	165	822	166
Ø30	H7/h6							381	124	626	147	681	158	760	156
	H7/k6							324	110	617	143	747	159	927	164
Ø32	H7/h6							245	101	499	133	613	149	837	154
	H7/k6							404	105	759	137	916	153	1121	158
Ø35	H7/h6							324	99	636	130	774	146	1047	151
<i>~~~</i>	H7/k6							422	94	733	120	1001	141	1220	149
Ø38	H7/h6							343	89	606	113	881	134	1085	141
<i>a</i>	H7/k6									825	117	1115	138	1357	145
Ø40	H7/h6									696	111	1001	132	1231	140
<i>a</i>	H7/k6									922	114	1044	126	1318	136
Ø42	H7/h6									792	110	888	119	1128	129
<i>a</i>	H7/k6									808	95	1218	122	1536	132
Ø45	H7/h6						1			678	90	1058	117	1339	127
<i>a</i>	H7/k6						1			937	92	1404	118	1768	128
Ø48	H7/h6									809	89	1241	115	1566	125
<i>a</i>	H7/k6											1432	111	1535	113
Ø50	H7/h6											1295	107	1331	108
<i><b>A</b>^{<i>r</i>}</i>	G7/m6													1823	109
Ø55	G7/h6													1475	104

The transmittable friction torques of the clamping connection consider the max. fitting tolerance with shaft tolerance k6 resp. h6/bore H7, from Ø55 G7/m6 or G7/h6. The friction torque is reduced with bigger fitting tolerance and use of a hollow shaft (see chapter 4.6). The surface pressure of the clamping connection specified considers the minimum fitting tolerance with shaft fit k6 resp. h6/bore H7, from Ø55 G7/m6 resp. G7/h6.



A calculation of the hollow shaft strength is necessary if hollow shafts are used (see chapter 4.6)!

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



1 Technical data

#### 1.3 Coupling dimensions

#### Table 10: Friction torques and surface pressure of clamping ring hubs 6.0 steel

S	ize	1	9	2	4	2	8	3	8	4	2	4	8	5	5	6	5	7	5	9	0
De	n Ø				Trar	nsmitta	ble frio	ction to	orque T	R of cl	ampin	g ring ł	nub [N	m]/su	rface p	oressu	re [N/m	רm²]			
BO	re Ø	Nm	N/mm ²	Nm	N/mm ²	Nm	N/mm ²	Nm	N/mm ²	Nm	N/mm ²	Nm	N/mm ²	Nm	N/mm ²	Nm	N/mm ²	Nm	N/mm ²	Nm	N/mm ²
Ø10	H7/k6	27	335	25	296																
010	H7/h6	15	262	10	223																
Ø11	H7/k6	32	334	30	296																
~	H7/h6	18	262	12	223																
Ø14	H7/k6	69	298	70	260																
	H7/h6	57	262	55	223	100	2000														
Ø15	H7/k6 H7/h6	84 74	288 262	87 74	250 223	108 74	296 243														
	H7/k6	57	202	56	212	131	243														
Ø16	H7/h6	38	197	32	168	97	243														
<i>α</i> 4 ο	H7/k6	94	228	97	200	207	277														
Ø19	H7/h6	76	197	72	168	172	243														
<i>a</i> 20	H7/k6	110	221	114	193	148	237	208	248												
Ø20	H7/h6	94	197	93	168	94	190	136	200												
Ø24	H7/k6			116	157	253	217	353	229												
024	H7/h6			84	130	207	190	290	200												
Ø25	H7/k6			133	153	285	213	395	120	445	246										
~ =0	H7/h6			103	130	242	190	337	200	387	221										
Ø28	H7/k6			192	141	315	190	439	200	495	219										
	H7/h6			173	130	267	168	373	178	429	197	616	017								
Ø30	H7/k6 H7/h6					382 343	184 168	531 476	194 178	595 540	213 197	616 513	217 191								
	H7/k6					330	168	463	170	526	197	704	216								
Ø32	H7/h6					260	144	367	152	429	169	590	191								
	H7/k6					433	160	603	169	677	185	899	208	863	179						
Ø35	H7/h6					377	144	525	152	600	169	806	191	750	161						
<i>a</i> 00	H7/k6					503	150	593	152	671	166	896	186	856	161						
Ø38	H7/h6					453	137	491	133	569	148	775	167	710	141						
Ø40	H7/k6							689	148	775	162	1030	182	991	157	1446	178				
Ø40	H7/h6							601	134	687	148	924	167	863	141	1275	161				
Ø42	H7/k6							793	144	718	149	962	167	918	145	1355	163	1710	180		
072	H7/h6							721	133	599	131	822	149	750	126	1135	144	1460	160		
Ø45	H7/k6							776	132	872	144	1160	162	1119	140	1637	158	2053	175		
	H7/h6							677	119	773	131	1042	149	976	126	1447	144	1836	160		
Ø48	H7/k6 H7/h6									1043 970	140 131	1379 1290	158 149	1110 934	129 114	1635 1404	145 130	2059 1797	160 145		
	H7/h6									1061	131	1290	149	934 1247	114	1827	143	2294	145	3845	221
Ø50	H7/h6									978	125	1073	143	1089	114	1619	143	2056	145	3445	200
~	G7/m6									070	120	1543	138	1277	115	1887	130	2384	144	4249	200
Ø55	G7/h6											1373	125	972	95	1488	110	1929	123	3556	178
acc	G7/m6													1665	110	2429	125	3040	138	4795	191
Ø60	G7/h6													1454	98	2142	113	2708	126	4080	168
Ø65	G7/m6													1605	99	2368	112	2983	124	5859	186
000	G7/h6													1287	84	1949	97	2507	108	5260	170
Ø70	G7/m6													2008	95	2930	108	3664	120	5906	168
210	G7/h6													1792	86	2635	99	3323	110	5153	150
Ø80	G7/m6																	4293	106	7036	150
~	G7/h6																	3945	98	6253	136
Ø90	G7/m6																			8047	136
	G7/h6													<u> </u>						7104	123
Ø95	G7/m6 G7/h6																			9247 8484	134 124
	01/10								1				1		1	1		1		0404	124

The transmittable friction torques of the clamping connection consider the max. fitting tolerance with shaft tolerance k6 resp. h6/bore H7, from Ø55 G7/m6 or G7/h6. The friction torque is reduced with bigger fitting tolerance and use of a hollow shaft (see chapter 4.6). The surface pressure of the clamping connection specified considers the minimum fitting tolerance with shaft fit k6 resp. h6/bore H7, from Ø55 G7/m6 resp. G7/h6.



A calculation of the hollow shaft strength is necessary if hollow shafts are used (see chapter 4.6)!

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



1 Technical data

#### 1.3 Coupling dimensions

#### Table 10 continued: Friction torques and surface pressure of clamping ring hubs 6.0 steel

S	ze	1	9	2	24	2	8	3	8	4	2	4	8	5	5	6	5	7	5	90	)
Bore Ø Transmittable friction torque T _R of clamping ring hub [Nm] / surface pressure [N/mm ² ]																					
50	eø	Nm	N/mm ²	Nm	N/mm ²																
Ø100	G7/m6																			9575	126
0100	G7/h6																			8722	117
G405	G7/m6																			10845	124
Ø105	G7/h6																			10202	118

The transmittable friction torques of the clamping connection consider the max. fitting tolerance with shaft tolerance k6/bore H7, from Ø55 G7/m6. The friction torque is reduced with bigger fitting tolerance and use of a hollow shaft (see chapter 4.6). The surface pressure of the clamping connection specified considers the minimum clearance with shaft fit k6/bore H7, from Ø55 G7/m6.



A calculation of the hollow shaft strength is necessary if hollow shafts are used (see chapter 4.6)!

#### Table 11: Friction torque and surface pressure of clamping ring hubs 6.0

Size	14	19	24	28	38
Bore Ø	Transmit	table friction torque T _R	of clamping ring hub [	Nm] / surface pressu	re [N/mm ² ]
Ø6	8.6				
Ø6	225				
Ø10	13.8	41			
010	130	272			
Ø11	14.7	45	48		
ØT	118	248	214		
Ø14	22.7	62	67		
014	108	211	182		
Ø15		68	74	142	
015		203	175	243	
Ø16		67	72	154	
010		171	148	231	
Ø19		83	90	189	
019		153	132	203	
Ø20		90	97	188	269
020		149	129	178 212	196
Ø22			99	212	307
022			107	167	183
Ø24			112	237	337
024			102	157	172
Ø25			120	250	356
023			100	153	167
Ø28			143	280	398
028			96	136	148
Ø30				307	436
\$250				131	142
Ø32				310	442
2002				115	126
Ø35				353	501
200				110	120
Ø38				389	533
230				103	107
Ø40					572
\$240					104
Ø42					615
2042					102
Ø45					644
240					92

The transmittable friction torques of the clamping connection consider the max. fitting tolerance with shaft tolerance k6/bore H7. The friction torque is reduced with bigger fitting tolerance and use of a hollow shaft (see chapter 4.6).

The surface pressure of the clamping connection specified considers the minimum fitting tolerance with shaft fit k6/bore H7.



A calculation of the hollow shaft strength is necessary if hollow shafts are used (see chapter 4.6)!

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



# 1 Technical data

## 1.3 Coupling dimensions

<u>DKM</u>

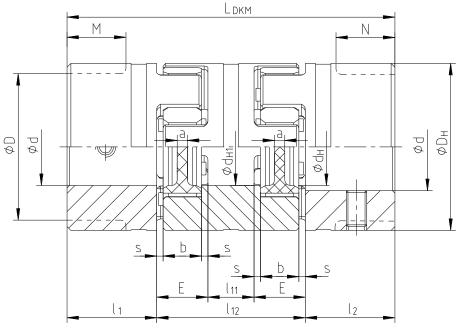


Illustration 10: ROTEX® GS DKM



Please refer to table 1 for torques and table 2 for finish bores.

Table 12: Dimensions - DKN	Table	12:	Dimensions	-	DKM
----------------------------	-------	-----	------------	---	-----

Ci-c		Dimensions [mm]														
Size	D	D _H	d _H	d _{H1}	$ _{1},  _{2}$	M, N	I ₁₁	I ₁₂	L _{DKM}	E	b	S	а			
			Spa	cer materi	al - alumir	nium/hub r	naterial de	epends on	hub type							
5	-	10	-	-	5	-	3	13	23	5	4	0.5	4.0			
7	-	14	-	-	7	-	4	20	34	8	6	1.0	6.0			
9	-	20	7.2	-	10	-	5	25	45	10	8	1.0	1.5			
12	-	25	8.5	-	11	-	6	30	52	12	10	1.0	3.5			
14	-	30	10.5	-	11	-	8	34	56	13	10	1.5	2.0			
19	-	40	18	18	25	-	10	42	92	16	12	2.0	3.0			
24	-	55	27	27	30	-	16	52	112	18	14	2.0	3.0			
28	-	65	30	30	35	-	18	58	128	20	15	2.5	4.0			
38	-	80	38	38	45	-	20	68	158	24	18	3.0	4.0			
42	85	95	46	46	50	28	22	74	174	26	20	3.0	4.0			
48	95	105	51	51	56	32	24	80	192	28	21	3.5	4.0			
55	110	120	60	60	65	37	28	88	218	30	22	4.0	4.5			

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	




#### 2 Advice

The **ROTEX**[®] **GS** coupling was developed for a backlash-free power transmission and easy plug-in assembly. This backlash-free power transmission arises in the area of prestress (see illustration 11). The big concave surface contact results in a lower surface pressure on the involute tooth. Consequently the tooth can be overloaded many times over with no wear/deformation.

Safe operation in the range of prestress is ensured, because the coupling operates according to the principle of positive-locking rubber spring prestress with high damping features. The star-shape coupling spider is inserted in the cams of the hubs which are machined specifically accurately with a small amount of prestress, resulting in the necessary backlash-free power transmission.

The axial insertion force varies depending on the coupling size, different kinds of Shore hardness and production tolerances.

Pegs on the lateral tooth in alternate arrangement



≘ mounting force F_M

Illustration 11: Prestress of spider

The flexible teeth compensating for misalignment are radially supported in the internal diameter by a web. An external deformation is limited by the concave shape of the cams, ensuring smooth operation even with bigger masses to be accelerated (e. g. machine tables, articulated arms, etc.).

The flexible spiders for the GS series are available in five different kinds of Shore hardness, injected in different colours, either as a torsionally soft or hard material.

#### 2.1 General advice

Please read through these operating/assembly instructions carefully before you start up the coupling. Please pay special attention to the safety instructions!



The **ROTEX**[®] **GS** coupling is suitable and approved for the use in potentially explosive atmospheres. When using the coupling in potentially explosive atmospheres, observe the special advice and instructions regarding safety in enclosure A.

In order to ensure the operating principle of **ROTEX[®] GS** and avoid early wear of the coupling, a respective operating factor "S_B" has to be considered with the selection, each depending on the application (see catalogue "Drive Technology"). Temperatures and shocks are provided with the corresponding factors, too (see catalogue "Drive Technology").

The operating/assembly instructions are part of your product. Please store them carefully and close to the coupling. The copyright for these operating/assembly instructions remains with KTR.

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	

KTR	KTR-Group	-	TEX [®] GS embly instructions	KTR-N Sheet: Edition:	45510 EN 18 of 41 24					
2 Advi	се									
2.2 Safe	ty and advice	symbols								
Æx>	Warning of p atmospheres	otentially explosive	This symbol indicates notes which may contribute to preventing bodily injuries or serious bodily injuries that may result in death caused by explosion.							
STOP	Warning of p	ersonal injury	This symbol indicates notes which may contribute to preventing bodily injuries or serious bodily injuries that may result in death.							
$\bigwedge !$	Warning of p	roduct damages	This symbol indicates notes which may contribute to preventing material or machine damage.							
	General advi	ce	This symbol indicates notes which may contribute to preventing adverse results or conditions.							
	Warning of h	ot surfaces	This symbol indicates notes which may contribute to preventing burns with hot surfaces resulting in light to serious bodily injuries.							

#### 2.3 General hazard warnings



With assembly, operation and maintenance of the coupling it has to be made sure that the entire drive train is secured against accidental switch-on. You may be seriously hurt by rotating parts. Make absolutely sure to read through and observe the following safety indications.

- All operations on and with the coupling have to be performed taking into account "safety first".
- Make sure to switch off the power pack before you perform your work on the coupling.
- Secure the power pack against accidental switch-on, e. g. by providing warning signs at the place of switch-on or removing the fuse for current supply.
- Do not reach into the operating area of the coupling as long as it is in operation.
- Secure the coupling against accidental contact. Provide for the necessary protection devices and covers.

#### 2.4 Intended use

You may only assemble, operate and maintain the coupling if you

- have carefully read through the operating/assembly instructions and understood them
- are technically qualified and specifically trained (e. g. safety, environment, logistics)
- are authorized by your company

The coupling may only be used in accordance with the technical data (see chapter 1). Unauthorized modifications on the coupling design are not admissible. We will not assume liability for any damage that may arise. In the interest of further development we reserve the right for technical modifications.

The **ROTEX[®] GS** described in here corresponds to the technical status at the time of printing of these operating/assembly instructions.

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



2 Advice

#### 2.5 Coupling selection

responsibility.

For a long-lasting and failure-free operation of the coupling it must be selected according to the selection instructions (following DIN 740, part 2 with specific factors) for the particular application (see catalogue drive technology "ROTEX® GS").
If the operating conditions (performance, speed, modifications on engine and machine) change, the coupling selection must be reviewed.
Make sure that the technical data regarding torque refer to the spider only. The transmittable torque of the shaft-hub-connection must be reviewed by the customer and is subject to his

For drives subject to torsional vibrations (drives with cyclic stress due to torsional vibrations) it is necessary to perform a torsional vibration calculation to ensure a reliable selection. Typical drives subject to torsional vibrations are e. g. drives with diesel engines, piston pumps, piston compressors etc. If requested, KTR will perform the coupling selection and the torsional vibration calculation.

#### 2.6 Reference to EC Machinery Directive 2006/42/EC

The couplings supplied by KTR should be considered as components, not machines or partly completed machines according to EC Machinery Directive 2006/42/EC. Consequently KTR does not have to issue a declaration of incorporation. For details about safe assembly, start-up and safe operation refer to the present operating/assembly instructions considering the warnings.

#### 3 Storage, transport and packaging

#### 3.1 Storage

The coupling hubs made of steel are supplied in preserved condition and can be stored at a dry and roofed place for 6 - 9 months.

The coupling hubs made of aluminium can be stored at a dry and roofed place for several years.

The features of the coupling spiders (elastomers) remain unchanged for up to 5 years with favourable storage conditions.



The storage rooms must not include any ozone-generating devices like e. g. fluorescent light sources, mercury-vapour lamps or electrical high-voltage appliances. Humid storage rooms are not suitable.

Make sure that condensation is not generated. The best relative air humidity is less than 65 %.

#### 3.2 Transport and packaging



In order to avoid any injuries and any kind of damage always make use of proper transport and lifting equipment.

The couplings are packed differently each depending on size, number and kind of transport. Unless otherwise contractually agreed, packaging will follow the in-house packaging specifications of KTR.

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



The coupling is generally supplied in individual parts. Before assembly the coupling has to be inspected for completeness.


#### 4.1 Components of the coupling

#### Features of standard spiders

Spider hardness			Incre	asing hardness			
(Shore) Size	80 ShA-GS (blue)	92 ShA-GS (yellow)	98 ShA-GS (red)	64 ShD-H-GS (green)	64 ShD-GS (green)	72 ShD-H-GS (grey)	72 ShD-GS (grey)
Size	5 - 24	5 - 55	5 - 90	7 - 38	42 - 90	24 - 38	42 - 90
Material	Polyurethane Polyurethane P		Polyurethane	Hytrel Polyurethane		Hytrel	Polyurethane
Marking (colour)				Ś	Polydreiniane		

#### Components of ROTEX[®] GS, hub type 1.0, 1.1 or 1.2

Component	Quantity	Description
1	2	Hub
2	1	Spider
3	2	Setscrew DIN EN ISO 4029

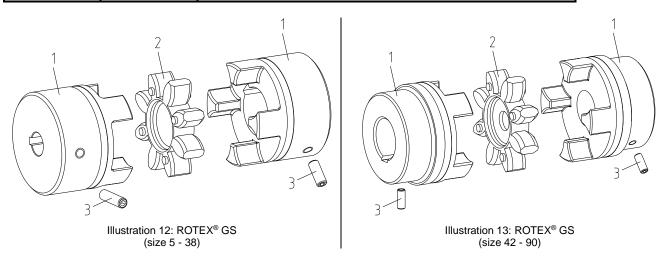



Hubs, clamping hubs or similar types without feather keyway may be used in category 3 only and are marked with category 3 accordingly.

Hub type 1.2 is not approved f	or potentially	explosive atmospheres!

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



#### 4.1 Components of the coupling

#### Components of ROTEX® GS clamping hubs, hub type 2.0, 2.1, 2.5 or 2.6

Component	Quantity	Description
1	2	Clamping hub
2	1	Spider
3	2	Cap screw DIN EN ISO 4762




Illustration 14: ROTEX® GS clamping hub

```
(B
```

Hubs, clamping hubs or similar types without feather keyway may be used in category 3 only and are marked with category 3 accordingly.

#### Components of ROTEX® GS Compact, hub type 2.8 or 2.9

(size 7 - 19)

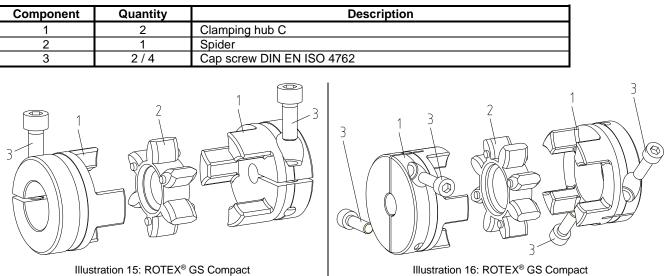


Illustration 16: ROTEX® GS Compact (size 24 - 38)



Hubs, clamping hubs or similar types without feather keyway may be used in category 3 only and are marked with category 3 accordingly.

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



#### 4.1 Components of the coupling

#### Components of ROTEX[®] GS clamping ring hubs, hub type 6.0 light, 6.0 steel or 6.0

Component	Quantity	Description
1.1	2	Clamping ring
1.2	2	Clamping ring hub
2	1	Spider
3	see table 5, 6 and 7	Cap screw DIN EN ISO 4762

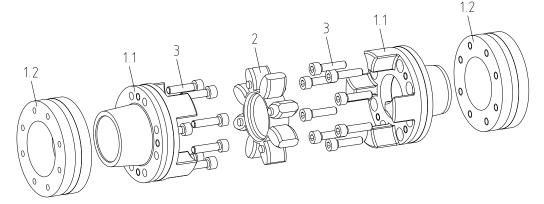


Illustration 17: ROTEX® GS clamping ring hub

#### Components of ROTEX[®] GS DKM

Component	Quantity	Description
1	2	Hub
2	2	Spider
3	1	DKM spacer
4	2	Setscrew DIN EN ISO 4029

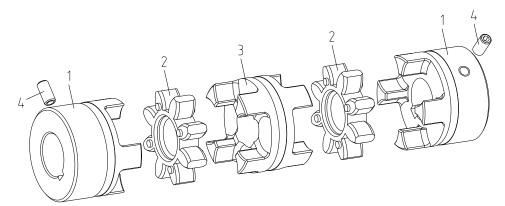


Illustration 18: ROTEX® GS DKM



Hubs, clamping hubs or similar types without feather keyway may be used in category 3 only and are marked with category 3 accordingly. Hub type 1.2 is not approved for potentially explosive atmospheres!

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



4 Assembly

#### 4.2 Advice for assembly

Subject to its design **ROTEX[®] GS** allows to axially plug in the coupling having assembled the hubs onto the shaft journal. Consequently there is no need for subsequent screwing and the respective mounting holes in the housing.

The pegs on the spider arranged reciprocally prevent a contact between the spider and the hubs over the full surface. Observing the distance dimension E, the ability for displacement of the coupling is ensured in this way. All teeth are chamfered on the face which allows for blind assembly. When the coupling hubs are pushed together with the **ROTEX**[®] **GS** spider an axial assembly force is generated resulting from the flexible prestress of the starshape elastomer. This assembly force varies depending on the coupling size, spider hardness and machining tolerances.

The axial insertion force is offset after having pushed together the hubs and consequently does not mean any risk of axial load affecting adjacent bearings.

The mounting force can be reduced by lightly greasing or lubricating the elastomer or the hubs. For this purpose please only use oils and greases on a mineral oil basis without any additives. Lubricants on a silicone basis or vaseline have proven their worth, too.

#### 4.3 Advice for finish bore



The maximum permissible bore diameters d (see chapter 1 - technical data) must not be exceeded. If these figures are disregarded, the coupling may tear. Rotating particles may cause danger to life.

- Hub bores machined by the customer have to observe concentricity resp. axial runout (see illustration 19).
- Make absolutely sure to observe the figures for Ød.
- Carefully align the hubs when the finish bores are drilled.
- Provide for a setscrew according to DIN EN ISO 4029 with a cup point or an end plate to fasten the hubs axially.




Illustration 19: Concentricity and axial runout



The customer bears the sole responsibility for all machining processes performed subsequently on unbored or pilot bored as well as finish machined coupling components and spare parts. KTR does not assume any warranty claims resulting from insufficient remachining.

KTR supplies unbored or pilot bored coupling components and spare parts only upon explicit request of the customer. These parts are additionally marked with the symbol D.

# Reference to unbored resp. pilot bored coupling components with explosion protection marking:

Basically the company KTR Systems GmbH supplies couplings resp. coupling hubs with explosion protection marking as an unbored or pilot bored type only on explicit request of the customer. The prerequisite is a declaration of exemption submitted by the customer assuming any responsibility and liability for respective remachining performed on the product of KTR Systems GmbH.

Replaced by:

#### Table 13: Setscrew DIN EN ISO 4029

Verified:

note ISO 16016.

Size	5	7	9	12	14	19	24	28	38	42	48	55	65	75	90
Dimension G	M2	M3	M4	M4	M4	M5	M5	M8	M8	M8	M8	M10	M10	M10	M12
Dimension t	2.5	3.5	5	5	5	10	10	15	15	20	20	20	20	25	30
Tightening torque T _A [Nm]	0.35	0.6	1.5	1.5	1.5	2	2	10	10	10	10	17	17	17	40
Please observe protection Drawn:					20	22-07-0	)6 Pz/W	/b	Rep	acing:		KTR-N	dated	2020-0	2-10

2022-08-05 Pz




#### Assembly of the coupling (general) 4.4



We recommend to inspect bores, shaft, keyway and feather key for dimensional accuracy before assembly.

Before starting with the assembly preserving agents have to be removed from the bores. Moreover, the shaft ends have to be cleaned carefully, too.

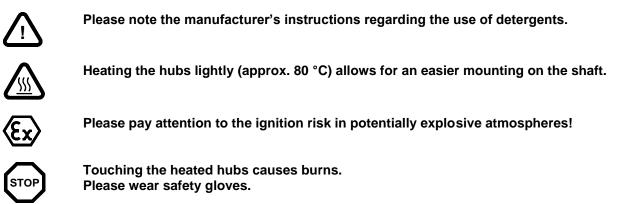

With the assembly make sure that the distance dimension E (see table 3 and 12) is observed to allow for axial clearance of the spider when in operation. Disregarding this advice may cause damage to the coupling.

If used in potentially explosive atmospheres the setscrews to fasten the hubs as well as all screw connections must be secured against working loose additionally, e.g. conglutinating with Loctite (average strength).

#### 4.5 Assembly of the hubs (hub type 1.0, 1.1 and 1.2)

- Mount the hubs on the shaft of driving and driven side.
- Insert the spider into the cam section of the hub on the driving or driven side.
- Shift the power packs in axial direction until the distance dimension E is achieved.
- If the power packs are already firmly assembled, shifting the hubs axially on the shafts allows for adjusting the distance dimension E.
- Applies with hub type 1.0 and 1.1 only: Fasten the hubs by tightening the setscrews DIN EN ISO 4029 with a cup point (tightening torques see table 13).



If the shaft diameters with inserted feather key are smaller than dimension  $d_H$  (see table 3 and 12) of the spider, one or two shaft ends may protude into the spider.



Hubs, clamping hubs or similar types without feather keyway may be used in category 3 only and are marked with category 3 accordingly. Hub type 1.2 is not approved for potentially explosive atmospheres!

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



4 Assembly

#### 4.6 Assembly of the clamping hubs (hub types 2.0, 2.1, 2.5, 2.6, 2.8 and 2.9)

The power transmission of ROTEX[®] GS clamping hubs (hub type 2.0, 2.5 and 2.8) is frictionally engaged. With hub type 2.1, 2.6 and 2.9 a feather key additionally provides for positive locking power transmission.



If used in potentially explosive atmospheres all screw connections must be secured against working loose additionally, e. g. conglutinating with Loctite (average strength).

- Clean and degrease the hub bore and the shaft.
- Lightly detach the clamping screws.
- Slip the hub onto the shaft. Please observe dimension I1 or I2.
- Tighten the clamping screws at the tightening torques specified in table 4.

With hub type 2.8 or 2.9 (with feather keyway) the screws have to be tightened alternately in equal steps at the tightening torques specified in table 6.



The transmittable friction torques of the clamping hubs depend on the bore diameter.




Illustration 20: Assembly of clamping hub

Please note: hub type 2.8 or 2.9 have 2 clamping screws



Hubs, clamping hubs or similar types without feather keyway may be used in category 3 only and are marked with category 3 accordingly.

 $\triangle$ 

If the clamping screws are not tightened at the correct tightening torque, there is the risk of a) a fracture of the hub and plastic deformation with a too high tightening torque  $T_A$ 

b) early slippling, untightening of the screws with a too low tightening torque  $T_{\mbox{\scriptsize A}}$ 

#### 4.7 Assembly of clamping ring hubs (hub type 6.0 light, 6.0 steel and 6.0)

The power transmission of **ROTEX[®] GS** clamping hubs is frictionally engaged. The necessary surface pressure is transmitted via the clamping ring with internal taper to the taper hub and consequently to the shaft. The friction torques specified in table 5 to 7 consider a fit pair H7/k6, from Ø55 G7/m6. With a bigger fitting tolerance the friction torques specified in table 9 to 11 are reduced.

The strength and dimensions of the shafts (specifically hollow shafts) have to be defined such that sufficient safety against plastic deformation is ensured. This may roughly be reviewed as per the following criterion.

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



#### 4 Assembly

#### 4.7 Assembly of clamping ring hubs (hub type 6.0 light, 6.0 steel and 6.0)

For clamping connections with hollow shafts the required internal diameter of the hollow shaft  $d_{iW}$  is calculated based on the following formula:

Shear stress on the internal shaft diameter for hollow shaft:

Shear stress for solid shaft:

<b>R</b> _{p0.2}	=	yield strength of shaft material [N/mm ² ]
pw	=	surface pressure of hub/shaft [N/mm ² ]

$$d_{_{IW}} \leq d \cdot \sqrt{\frac{R_{_{p0,2}} - 2 \cdot p_{_W}}{R_{_{p0,2}}}} \quad \left[mm\right]$$

$$\sigma_{tiW} \approx -\frac{2 \cdot p_{W}}{1 - C_{W}^{2}} \quad \left[ N / mm^{2} \right]$$

$$\sigma_{\rm tw} = -p_{\rm w} \left[ {\rm N} \,/ \, {\rm mm}^2 \right]$$

d_{iw} = internal diameter of hollow shaft [mm]

= shaft diameter [mm]

 $C_W = d_{iW}/d$ 

The strength required is not provided if the hollow shaft bore is bigger than the max. internal bore calculated or if the shear stress exceeds the yield strength of the material. For a detailed calculation please contact KTR.



If used in potentially explosive atmospheres all screw connections must be secured against working loose additionally, e. g. conglutinating with Loctite (average strength).


d

 Clean the hub bore and shaft and review for dimensional accuracy, afterwards lubricate with a thin oil (e. g. Castrol 4 in 1, Klüber Quietsch-Ex or WD-40).



#### Oils and greases containing molybdenum disulfide or other high-pressure additives as well as internal lubricants must not be used.

- Lightly untighten the clamping screw and pull the clamping ring from the hub only marginally to make sure that the clamping ring is fitted loosely.
- Shift the clamping ring hub onto the shaft. Dimension I₃ should be observed at the minimum (see table 8).
- Tighten the clamping screws evenly crosswise gradually to the tightening torque specified in table 8. Repeat this process until all clamping screws have reached the tightening torque.



Extraction thread Illustration 21: Assembly of clamping ring hub with clamping ring



If the clamping screws are not tightened at the correct tightening torque, there is the risk of a) a fracture of the hubs/cams and plastic deformation with a too high tightening torque  $T_A$  b) early slippling, untightening of the screws with a too low tightening torque  $T_A$ 

#### <u>Applies with hub type 6.0 light only:</u>

Tighten the clamping screws evenly gradually and crosswise at 1/3 or 2/3 tightening torque T_A, respectively (see table 8) until the ring gets in contact. Afterwards tighten the screws at the tightening torque mentioned in table 8 one after another.

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



4 Assembly

## 4.8 Disassembly of clamping ring hubs (hub type 6.0 light, 6.0 steel and 6.0)


Unscrew the clamping screws evenly one after another. During each revolution every screw may only be unscrewed by half a turn. Unscrew all clamping screws by 3 - 4 pitches.

Remove the screws located next to the extraction threads and screw them into the intended extraction threads until they fit.

The clamping ring is released by tightening the screws in the extraction threads evenly gradually and crosswise.



If these hints are not observed, the operation of the coupling may be affected.



extraction thread

Illustration 22: Disassembly of clamping ring hub with clamping ring

If the assembly is repeated the bore of the hub and shaft have to be cleaned and afterwards lubricated with a thin oil (e. g. Castrol 4 in 1, Klüber Quietsch-Ex or WD-40). The same applies for the taper surfaces of clamping ring hub and clamping ring.



Oils and greases containing molybdenum disulfide or other high-pressure additives as well as internal lubricants must not be used.

#### Applies with hub type 6.0 light only:

(P

If the assembly is repeated the taper surfaces, bores of the hub and the shaft have to be cleaned. The bore of the hub and shaft have to be lubricated with thin oil (e. g. Castrol 4 in 1, Klüber Quietsch-Ex or WD-40). Lightly paint the taper surfaces of the clamping ring hub or clamping ring with the grease Gleitmo 800, afterwards twist the components against one another by one revolution in order to spread the grease evenly.

#### 4.9 Displacements - alignment of the couplings

The displacement figures specified in tables 14 and 15 provide for sufficient safety to compensate for external influences like, for example, thermal expansion or foundation settling.



In order to ensure a long service life of the coupling and avoid hazards with the use in potentially explosive atmospheres, the shaft ends must be accurately aligned. Please absolutely observe the displacement figures specified (see tables 14 and 15). If the figures are exceeded, the coupling will be damaged. The more accurate the alignment of the coupling, the longer is its service life.

The more accurate the alignment of the coupling, the longer is its service life. If used in potentially explosive atmospheres for explosion group IIC, only half of the displacement figures (see tables 14 and 15) is permissible.


#### Please note:

- The displacement figures specified in tables 14 and 15 are maximum figures which must not arise in parallel. If radial and angular displacements arise simultaneously, the permissible displacement values may only be used proportionally (see illustration 24).
- Inspect with a dial gauge, ruler or feeler whether the permissible displacement figures of tables 14 and 15 can be observed.

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



#### 4.9 Displacements - alignment of the couplings







Illustration 23: Displacements




 $\Delta K_w \text{ [mm]} = L_{1 \text{max}} - L_{1 \text{min}}$ 

Examples of the displacement combinations specified in illustration 24:

Example 1:  $\Delta K_r = 30 \%$  $\Delta K_w = 70 \%$ 

Example 2:  $\Delta K_r = 60 \%$  $\Delta K_w = 40 \%$  Illustration 24: Combinations of displacement



 $\Delta K_{total} = \Delta K_r + \Delta K_w \le 100 \text{ \%}$ 

#### **Table 14: Displacement figures**

	Max. axial		Max. radial	displaceme	ent ∆K _r [mm	]		Ma	x. angi	ular dis	splace	ment A	K _w [de	gree/r	nm]	
Size	displace- ment ∆K _a [mm]	80 ShA-GS	92 ShA-GS	98 ShA-GS	64 ShD-GS	72 ShD-GS	8 ShA _{Degree}	-	9 ShA _{Degree}	_	9 ShA _{Degree}	8 -GS 	6 ShD _{Degree}	4 -GS ^{mm}		2 -GS ^{mm}
5	+0.4 / -0.2	0.12	0.06	0.04	-	-	1.1	0.2	1.0	0.15	0.9	0.15	-	-	-	-
7	+0.6 / -0.3	0.15	0.10	0.06	0.04	-	1.1	0.25	1.0	0.2	0.9	0.2	0.8	0.2	-	-
8	+0.6 / -0.5	0.15	-	0.08	0.06	-	1.1	0.4	-	-	0.9	0.3	0.8	0.3	-	-
9	+0.8 / -0.4	0.19	0.13	0.08	0.05	-	1.1	0.5	1.0	0.35	0.9	0.3	0.8	0.3	-	-
12	+0.9 / -0.4	0.20	0.14	0.08	0.05	-	1.1	0.5	1.0	0.45	0.9	0.4	0.8	0.35	-	-
13	+0.9 / -0.8	0.20	-	0.08	0.05	-	1.1	0.5	-	•	0.9	0.4	0.8	0.35	-	-
14	+1.0 / -0.5	0.21	0.15	0.09	0.06	-	1.1	0.6	1.0	0.5	0.9	0.5	0.8	0.4	-	-
16	+1.0 / -0.8	0.21	-	0.10	0.08	-	1.1	0.6	-	•	0.9	0.5	0.8	0.4	-	-
19	+1.2 / -0.5	0.15	0.10	0.06	0.04	-	1.1	0.75	1.0	0.7	0.9	0.6	0.8	0.55	-	-
24	+1.4 / -0.5	-	0.14	0.10	0.07	0.04	-		1.0	1.0	0.9	0.85	0.8	0.75	0.7	0.65
28	+1.5 / -0.7	-	0.15	0.11	0.08	0.05	-		1.0	1.1	0.9	1.0	0.8	0.9	0.7	0.8
38	+1.8 / -0.7	-	0.17	0.12	0.09	0.06	-		1.0	1.4	0.9	1.25	0.8	1.1	0.7	1.0
42	+2.0 / -1.0	-	0.19	0.14	0.10	0.07	-		1.0	1.65	0.9	1.5	0.8	1.3	0.7	1.1
48	+2.1 / -1.0	-	0.23	0.16	0.11	0.08	-		1.0	1.85	0.9	1.65	0.8	1.45	0.7	1.3
55	+2.2 / -1.0	-	0.24	0.17	0.12	0.09	-		1.0	2.1	0.9	1.85	0.8	1.7	0.7	1.4
65	+2.6 / -1.0	-	-	0.18	0.13	0.10	-		-		0.9	2.1	0.8	1.9	0.7	1.6
75	+3.0 / -1.5	-	-	0.21	0.15	0.11	-		-		0.9	2.5	0.8	2.2	0.7	2.0
90	+3.4 / -1.5	-	-	0.23	0.17	0.13	-		-		0.9	3.1	0.8	2.8	0.7	2.4

The permissible displacement figures of the flexible **ROTEX® GS** couplings specified are general standard values taking into account the load of the coupling up to the rated torque  $T_{KN}$  of the coupling and an ambient temperature of +30 °C.

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



#### **ROTEX® GS Operating/Assembly instructions**

#### Assembly Δ

#### 4.9 **Displacements - alignment of the couplings**

#### Table 15: Displacement figures - type DKM

	Max. axial		Max. radial	displaceme	nt ∆K _r [mm]		Ма	ax. angular o	displacemen	t $\Delta K_w$ [degree	ee]
Size	displaceme	80	92	98	64	72	80	92	98	64	72
	nt $\Delta K_a$ [mm]	ShA-GS	ShA-GS	ShA-GS	ShD-GS	ShD-GS	ShA-GS	ShA-GS	ShA-GS	ShD-GS	ShD-GS
5	+0.4 / -0.4	0.15	0.14	0.13	-	-	1.1	1.0	0.9	-	-
7	+0.6 / -0.6	0.23	0.21	0.19	0.17	-	1.1	1.0	0.9	0.8	-
9	+0.8 / -0.8	0.29	0.26	0.24	0.21	-	1.1	1.0	0.9	0.8	-
12	+0.9 / -0.9	0.35	0.32	0.29	0.25	-	1.1	1.0	0.9	0.8	-
14	+1.0/-1.0	0.40	0.37	0.33	0.29	-	1.1	1.0	0.9	0.8	-
19	+1.2 / -1.0	0.49	0.45	0.41	0.36	-	1.1	1.0	0.9	0.8	-
24	+1.4 / -1.0	-	0.59	0.53	0.47	0.42	-	1.0	0.9	0.8	0.7
28	+1.5 / -1.4	-	0.66	0.60	0.53	0.46	-	1.0	0.9	0.8	0.7
38	+1.8/-1.4	-	0.77	0.69	0.61	0.54	-	1.0	0.9	0.8	0.7
42	+2.0 / -2.0	-	0.84	0.75	0.67	0.59	-	1.0	0.9	0.8	0.7
48	+2.1 / -2.0	-	0.91	0.82	0.73	0.64	-	1.0	0.9	0.8	0.7
55	+2.2 / -2.0	-	1.01	0.91	0.81	0.71	-	1.0	0.9	0.8	0.7

The permissible displacement figures of the flexible ROTEX® GS couplings specified are general standard values taking into account the load of the coupling up to the rated torque  $T_{KN}$  of the coupling and an ambient temperature of +30 °C.

#### 5 Start-up

Before start-up of the coupling, inspect the tightening of the setscrews in the hubs, the alignment and the distance dimension E and adjust, if necessary, and also inspect all screw connections for the tightening torques specified.



#### If used in potentially explosive atmospheres the setscrews to fasten the hubs as well as all screw connections must be secured against working loose additionally, e.g. conglutinating with Loctite (average strength).

Finally the coupling protection against accidental contact must be fitted. It is required in accordance with DIN EN ISO 12100 (Safety of Machinery) and directives 2014/34/EU and SI 2016 No. 1107 and must protect against

- access with the little finger
- falling down of solid foreign objects.

The coupling protection is not part of KTR's scope of delivery and is the customer's responsibility. It must have sufficient distance to the rotating components to avoid contact safely. Depending on the outside diameter DH of the coupling, we recommend the following minimum distance: ØDH to 50 mm = 6 mm, ØDH 50 mm to 120 mm = 10 mm, ØDH from 120 mm = 15 mm.

Please check if a proper enclosure (ignition protection, coupling protection, contact protection) has been mounted and the operation of the coupling is not affected by the enclosure. The same applies for test runs and rotational direction inspections.

The cover may provide for openings intended for necessary heat dissipation. These openings have to comply with DIN EN ISO 13857.

The cover must be electrically conductive and included in the equipotential bonding. Bellhousings (magnesium share below 7.5 %) made of aluminium and damping rings (NBR) can be used as connecting element between pump and electric motor. The cover may only be taken off with standstill of the unit.

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



5 Start-up



If the couplings are used in locations subject to dust explosion and in mining the user must make sure that there is no accumulation of dust <u>in a dangerous volume</u> between the cover and the coupling. The coupling must not operate in an accumulation of dust.

For covers with unlocked openings on the top face no light metals must be used if the couplings are used as equipment of equipment group II (*if possible, from stainless steel*). If the couplings are used in mining (equipment group I M2), the cover must not be made of light metal. In addition, it must be resistant to higher mechanical loads than with use as equipment of equipment group II.

During operation of the coupling, please pay attention to

- different operating noise
- vibrations occurring.



If you note any irregularities with the coupling during operation, the drive unit must be switched off immediately. The cause of the breakdown must be specified by means of the table "Breakdowns" and, if possible, be eliminated according to the proposals. The potential breakdowns specified can be hints only. To find out the cause all operating factors and machine components must be considered.

#### Coating of coupling:



If coated (priming, paintings, etc.) couplings are used in potentially explosive atmospheres, the requirements on conductibility and coating thickness must be considered. With paintings up to 200 µm electrostatic load does not have to be expected. If thicker paintings resp. coatings up to a layer thickness of a maximum of 2.0 mm are applied, the couplings are <u>not</u> permissible for gases and vapours of category IIC in potentially explosive areas, but only for gases and vapours of category IIA and IIB.

This also applies for multiple coatings exceeding an overall thickness of 200  $\mu$ m. Make sure with painting or coating that the coupling components are conductively connected with the device/devices to be connected so that the equipotential bonding is not impeded by the paint or coat applied. Basically painting of the spider is not admitted to ensure an equipotential bonding.

In addition, make sure that the marking of the coupling remains legible.

#### 6 Breakdowns, causes and elimination

The below-mentioned failures can lead to a use of the **ROTEX**[®] **GS** coupling other than intended. In addition to the specifications given in these operating/assembly instructions make sure to avoid such failures. The errors listed can only be clues to search for the failures. When searching for the failure the adjacent components must generally be considered.



The coupling can become a source of ignition with improper use. Directive 2014/34/EU and UK directive SI 2016 No. 1107 require special care by the manufacturer and the user.

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



#### 6 Breakdowns, causes and elimination

#### General failures with use other than intended:

- Important data for the coupling selection are not forwarded.
- The calculation of the shaft-hub-connection is not considered.
- Coupling components with damage occurred during transport are assembled.
- If the heated hubs are assembled, the permissible temperature is exceeded.
- The clearance of the components to be assembled is not coordinated with one another.
- Tightening torques have been fallen below/exceeded.
- Components are mixed up by mistake/assembled incorrectly.
- A wrong or no spider is inserted in the coupling.
- No original **KTR** components (purchased parts) are used.
- Old/already worn out spiders or spiders stored for too long are used.
- Maintenance intervals are not observed.

Breakdowns	Causes	Hazard notes for potentially explosive atmospheres	Elimination
	Misalignment	Increased temperature on the spider surface; ignition risk by hot surfaces	<ol> <li>Set the unit out of operation</li> <li>Eliminate the reason for the misalignment (e. g. loose foundation bolts, fracture of the engine mount, heat expansion of unit components, modification of the installation dimension E of the coupling)</li> <li>For inspection of wear see chapter 10.2</li> </ol>
Different operating noise and/or vibrations occuring	Wear of spider, short- term torque transmission due to metal contact	Ignition risk due to sparking	<ol> <li>Set the unit out of operation</li> <li>Disassemble the coupling and remove residues of the spider</li> <li>Inspect coupling components and replace coupling components that have been damaged</li> <li>Insert spider, assemble coupling components</li> <li>Inspect alignment, adjust if necessary</li> </ol>
	Screws for axial fastening of hubs working loose	Ignition risk due to hot surfaces and sparking	<ol> <li>Set the unit out of operation</li> <li>Inspect alignment of coupling</li> <li>Tighten the screws to fasten the hubs and secure against working loose</li> <li>For inspection of wear see chapter 10.2</li> </ol>
	Wear of spider, torque transmission due to metal contact Fracture of the cams		<ol> <li>Set the unit out of operation</li> <li>Replace complete coupling</li> <li>Inspect alignment</li> <li>Set the unit out of operation</li> <li>Replace complete coupling</li> </ol>
Breaking of cams	due to high impact energy/overload Operating parameters do not meet with the performance of the coupling	Ignition risk due to sparking	<ul> <li>3) Inspect alignment</li> <li>4) Find out the reason for overload</li> <li>1) Set the unit out of operation</li> <li>2) Review the operating parameters and select a bigger coupling (consider mounting space)</li> <li>3) Assemble new coupling size</li> </ul>
	Operating error of the unit		<ol> <li>4) Inspect alignment</li> <li>1) Set the unit out of operation</li> <li>2) Replace complete coupling</li> <li>3) Inspect alignment</li> <li>4) Instruct and train the service staff</li> </ol>

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



KTR-N	45510 EN
Sheet:	32 of 41
Edition:	24

#### 6 Breakdowns, causes and elimination

Breakdowns	Causes	Hazard notes for potentially explosive atmospheres	Elimination
	Misalignment	Increased temperature on the spider surface; ignition risk by hot surfaces	<ol> <li>Set the unit out of operation</li> <li>Eliminate the reason for the misalignment         <ul> <li>(e. g. loose foundation bolts, fracture of the engine mount, heat expansion of unit components, modification of the installation dimension E of the coupling)</li> <li>For inspection of wear see chapter 10.2</li> </ul> </li> </ol>
Early wear of spider or reverse backlash	e. g. contact with aggressive liquids/oils, ozone influence, too high/low ambient temperatures etc. causing physical modification of the spider	Ignition risk due to sparking with metallic contact of the cams	<ol> <li>Set the unit out of operation</li> <li>Disassemble the coupling and remove residues of the spider</li> <li>Inspect coupling components and replace coupling components that have been damaged</li> <li>Insert spider, assemble coupling components</li> <li>Inspect alignment, adjust if necessary</li> <li>Make sure that further physical modifications of the spider are excluded</li> </ol>
Early wear of spider or reverse backlash	excessively high/low ambient/contact temperatures for the spider, max. permissible -30 °C/+90 °C	Ignition risk due to	<ol> <li>Set the unit out of operation</li> <li>Disassemble the coupling and remove residues of the spider</li> <li>Inspect coupling components and replace coupling components that have been damaged</li> <li>Insert spider, assemble coupling components</li> <li>Inspect alignment, adjust if necessary</li> <li>Inspect and adjust ambient/contact temperature (correct by using other spider materials, if necessary)</li> </ol>
Early wear of spider (liquefaction of material inside the spider cam)	Vibrations of drive	sparking with metallic contact of the cams	<ol> <li>Set the unit out of operation</li> <li>Disassemble the coupling and remove residues of the spider</li> <li>Inspect coupling components and replace coupling components that have been damaged</li> <li>Insect spider, assemble coupling components</li> <li>Inspect alignment, adjust if necessary</li> <li>Find out the reason for the vibrations (possibly corrective by spider with lower or higher Shore hardness)</li> </ol>



When operating with a worn spider (see chapter 10.3) proper operation is not ensured.

#### 7 Disposal

In respect of environmental protection we would ask you to dispose of the packaging resp. products on termination of their service life in accordance with the legal regulations resp. standards that apply.

Metal

Any metal components have to be cleaned and disposed of by scrap metal.

#### Nylon materials

Nylon materials have to be collected and disposed of by a waste disposal company.

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



#### 8 Maintenance and service

**ROTEX[®] GS** is a low-maintenance coupling. We recommend to perform a visual inspection on the coupling **at least once a year**. Please pay special attention to the condition of the coupling spiders.

- Since the flexible machine bearings of the driving and driven side settle during the course of load, inspect the alignment of the coupling and re-align the coupling, if necessary.
- The coupling components have to be inspected for damages.
- The screw connections have to be inspected visually.



With the use in potentially explosive atmospheres observe chapter 10.2 "Inspection intervals for couplings in (a) potentially explosive atmospheres".

#### 9 Spares inventory, customer service addresses

We recommend to store major spare parts on site to ensure the readiness for use of the machine in case if a coupling fails.

Contact addresses of the KTR partners for spare parts and orders can be obtained from the KTR homepage at www.ktr.com.



KTR does not assume any liability or warranty for the use of spare parts and accessories which are not provided by KTR and for the damages which may incur as a result.

#### KTR Systems GmbH Carl-Zeiss-Str. 25 D-48432 Rheine Phone: +49 5971 798-0 E-mail: mail@ktr.com

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



Advice and instructions regarding the use in **CX** potentially explosive atmospheres

Applicable hub designs/types:

a) Hubs that may be used in group II, category 2 and 3 : (hubs with feather keyway and hubs with CLAMPEX[®] clamping set or clamping ring hubs)

- 1.0 Hub with feather keyway and setscrew
- 2.1 Clamping hub single slot with feather keyway
- 2.6 Clamping hub double slot with feather keyway
- 2.9 Clamping hub with axial slot with feather keyway
- 6.0 Clamping ring hub light
- 6.0 Clamping ring hub
- 6.5 Clamping ring hub
  - (hub type as 6.0, but external clamping screws only)
- Type DKM with hubs corresponding to the aforementioned details

#### b) Hubs which may be used in group II, category 3 only: (hubs without feather keyway)


- 1.1 Hub without feather keyway, with setscrew
- 2.0 Clamping hub single slot without feather keyway
- 2.5 Clamping hub double slot without feather keyway
- 2.8 Clamping hub with axial slot without feather keyway
- Type DKM with hubs corresponding to the aforementioned details

ROTEX[®] GS type DKM only with spacer made of steel or aluminium wrought products with a yield stress  $R_{p0.2} \ge 250 \text{ N/mm}^2$ .



Hubs, clamping hubs or similar types without feather keyway may be used in category 3 only and are marked with category 3 accordingly. Hub type 1.2 is not approved for potentially explosive atmospheres!

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	

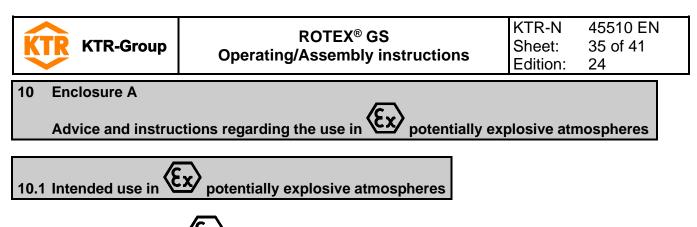

# Conditions of operation in **Ex** potentially explosive atmospheres

The ROTEX® GS couplings are suitable for the use according to directives 2014/34/EU and SI 2016 No. 1107.

- Protection against hazards arising from lightning must follow the lightning protection concept of the machine or plant. The relevant regulations and policy for lightning protection must be observed.
- The equipotential bonding of the couplings is made by metal contact between coupling hub and shaft. This equipotential bonding must not be affected.

#### 1. Industry (with the exception of mining)

- Equipment group II of category 2 and 3 (*coupling is <u>not</u> approved/<u>not</u> suitable for equipment group 1)*
- Substance group G (gases, fogs, vapours), zone 1 and 2 (coupling is <u>not</u> approved/<u>not</u> suitable for zone 0)
- Substance group D (dusts), zone 21 and 22 (coupling is not approved/not suitable for zone 20)
- Explosion group IIC (gases, fogs, vapours) (explosion groups IIA and IIB are included in IIC) and explosion group IIIC (dusts) (explosion groups IIIA and IIIB are included in IIIC)

#### Temperature class:

Temperature class	Ambient or operating temperature Ta ¹⁾	Max. surface temperature ²⁾
T4	-30 °C to +90 °C	+110 °C
T5	-30 °C to +75 °C	+95 °C
Т6	-30 °C to +60 °C	+80 °C

#### Explanation:

The maximum surface temperatures each result from the maximum permissible ambient or operating temperature  $T_a$  plus the maximum temperature increase  $\Delta T$  of 20 K to be considered. For the temperature class a safety margin subject to standard of 5 K is added.

1) The ambient or operating temperature T_a is limited to +90 °C due to the permissible permanent operating temperature of the elastomers used.

2) The maximum surface temperature of +110 °C applies for the use in locations which are potentially subject to dust explosion.

In potentially explosive atmospheres

- the ignition temperature of dusts generated must at least be 1.5 times the surface temperature to be considered
- the glow temperature must at least be the surface temperature to be considered plus a safety distance of 75 K.
- the gases and vapours generated must amount to the temperature class specified.

#### 2. Mining

Equipment group I of category M2 (*coupling is <u>not</u> approved/<u>not</u> suitable for equipment group M1*). Permissible ambient temperature -30 °C to +90 °C.

In mining for equipment group I of category M2 coupling hubs and DKM spacers made of steel only are permissible.

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



> potentially explosive atmospheres Advice and instructions regarding the use in

(£x 10.2 Inspection intervals for couplings in potentially explosive atmospheres

Equipment category	Inspection intervals
3G 3D	For couplings operated in zone 2 or zone 22 the inspection and maintenance intervals of the usual operating/assembly instructions for standard operation apply. During the standard operation which has to be taken as a basis of the ignition risk analysis the couplings are free from any ignition source. For gases, vapours and dusts generated the permissible glow and ignition temperatures specified in chapter 10.1 have to be considered and observed.
M2 2G 2D No gases and vapours of explosion group IIC	An inspection of the torsional backlash and a visual inspection of the flexible spider must be performed after 3,000 operating hours for the first time, at the latest after 6 months after start-up of the coupling. If you note insignificant or no wear on the spider upon this initial inspection, further inspections can each be performed after 6,000 operating hours or at the latest after 18 months, provided that the operating parameters remain the same. If you note significant wear during the initial inspection so that it would be recommendable to replace the spider, please find out the cause according to the table "Breakdowns", if possible. The maintenance intervals must be adjusted to the modified operating parameters without fail.
M2 2G 2D Gases and vapours of explosion group IIC	An inspection of the torsional backlash and a visual inspection of the flexible spider must be performed after 2,000 operating hours for the first time, at the latest after 3 months after start-up of the coupling. If you note insignificant or no wear on the spider upon this initial inspection, further inspections can each be performed after 4,000 operating hours or at the latest after 12 months, provided that the operating parameters remain the same. If you note significant wear during the initial inspection so that it would be recommendable to replace the spider, please find out the cause according to the table "Breakdowns", if possible. The maintenance intervals must be adjusted to the modified operating parameters without fail.



Hubs, clamping hubs or similar types without feather keyway may be used in category 3 only and are marked with category 3 accordingly.




Illustration 25: ROTEX® GS backlash-free shaft coupling

ROTEX[®] GS backlash-free shaft couplings




Illustration 26: ROTEX® GS spider

If the drive allows for, backlash between the cams of the coupling and the flexible spider has to be measured by means of a feeler gauge.

When reaching the wear limit *maximum friction*, the spider must be replaced immediately, irrespective of the inspection intervals.

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	

	(TR-Group
--	-----------

Advice and instructions regarding the use in *(Ex)* potentially explosive atmospheres

#### 10.3 Standard values of wear


In case of backlash > X mm, the flexible spider must be replaced.

Monitoring of the general condition of the coupling can be done both at standstill and during operation. If the coupling is tested during operation, the operator must ensure an appropriate and proven test procedure (e.g. stroboscopic lamp, high-speed camera, etc.) which is definitely comparable to testing at standstill. If any distinctive features occur, an inspection must be made with the machine stopped.

Reaching the limits for replacing depends on the operating conditions and the existing operating parameters.



In order to ensure a long service life of the coupling and avoid hazards with the use in potentially explosive atmospheres, the shaft ends must be accurately aligned. Please absolutely observe the displacement figures specified (see tables 14 and 15). If the figures are exceeded, the coupling will be damaged.






Illustration 27: Inspection of the limit of wear

Illustration 28: Wear of spider

# For backlash-free applications no wear is permitted, since otherwise the operating principle of the coupling (backlash-free condition) is no longer ensured. If a backlash-free operation is not required, the following figures apply:

Table 16:

(B

Size	Limits of wear (friction)	Size	Limits of wear (friction)
Size	X _{max.} [mm]	Size	X _{max} . [mm]
5	0.4	24	1.0
7	0.5	28	1.4
8	0.4	38	1.7
9	0.9	42	2.0
12	0.6	48	2.25
13	0.5	55	2.50
14	1.25	65	2.75
16	0.7	75	3.00
19	0.9	90	3.25

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



Advice and instructions regarding the use in *Ex* potentially explosive atmospheres

10.4 marking of coupling for potentially explosive atmospheres

The explosion protection marking of the ROTEX[®] GS coupling is applied on the outer sheath or on the front side. The flexible spider is excluded.

For the complete marking refer to the operating/assembly instructions and/or the delivery note/package.

#### The following marking applies for the products:

• Type without aluminium, with feather keyway and/or clamping ring hub (Category 2)

(E) (E	Ex h Ex h Ex h	IIC		T4 T110 ℃	Mb Gb Db	
<year> KTR Syste</year>			+60 °C -Str. 25, [		е	

• Type without aluminium, without feather keyway (Category 3)

€x C€ UK CA	II 3G	Ex h Ex h Ex h	IIC	T6 T80 °C		T4 T110 ℃	Mb Gc Dc	X
<year></year>		-30 °C :	≤ T _a ≤	+60 °C		+90 °C		
KTR Systems GmbH, Carl-Zeiss-Str. 25, D-48432 Rheine								

• Type with aluminium, with feather keyway and/or clamping ring hub (Category 2)

 II 2G
 Ex h
 IIC
 T6
 ...
 T4
 Gb
 X

 II 2D
 Ex h
 IIIC
 T80 °C
 ...
 T110 °C
 Db
 X

 <Year>
 -30 °C ≤ T_a ≤ +60 °C
 ...
 +90 °C

 KTR Systems GmbH, Carl-Zeiss-Str. 25, D-48432 Rheine

• Type with aluminium, without feather keyway (Category 3)

<pre>Example</pre>	II 3G	Ex h	IIC	T6		T4	Gc	Х
CA	II 3D	Ex h	IIIC	T80 °C		T110 °C	Dc	Х
<year></year>		-30 °C	≤ T _a ≤	+60 °C		+90 °C		
KTR Systems GmbH, Carl-Zeiss-Str. 25, D-48432 Rheine								


#### Short marking:

(A short marking is only made if not possible differently for reason of space or functioning.)

ROTEX[®] GS <Year>



Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	

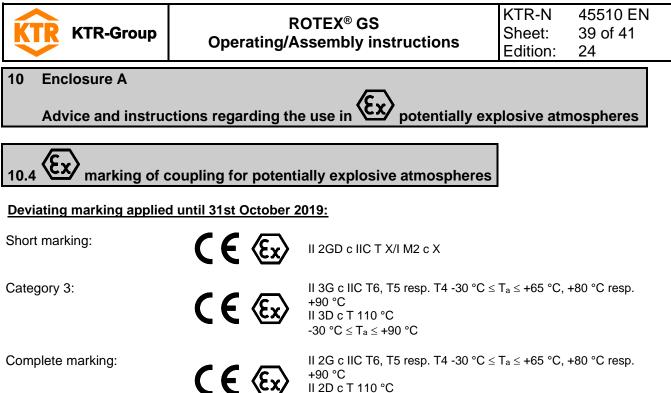

II 2D C I 110 °CI M2 C -30 °C  $\leq T_a \leq +90 °C$ 

#### **Comments on marking**

Equipment group I	Mining
Equipment group II	Non-mining
Equipment category 2G	Equipment ensuring a high level of safety, suitable for zone 1
Equipment category 3G	Equipment ensuring a normal level of safety, suitable for zone 2
Equipment category 2D	Equipment ensuring a high level of safety, suitable for zone 21
Equipment category 3D	Equipment ensuring a normal level of safety, suitable for zone 22
Equipment category M2	Equipment ensuring a high level of safety must be able to be switched off
	when an explosive atmosphere occurs
D	Dust
D G	Gases and vapours
Ex h	Nonelectrical explosion protection
IIC	Gases and vapours of class IIC (including IIA and IIB)
IIIC	Electrically conductive dusts of class IIIC (including IIIA and IIIB)
T6 T4	Temperature class to be considered, depending on the ambient temperature
T80 °C T110 °C	Maximum surface temperature to be considered, depending on the ambient
	temperature
$-30 \text{ °C} \le T_a \le +60 \text{ °C} \dots +90 \text{ °C}$ or	Permissible ambient temperature from -30 °C to +60 °C resp.
-30 °C ≤ T _a ≤ +90 °C	-30 °C to +90 °C
Gb, Db, Mb	Equipment protection level, high level of safety, analogous to the equipment
	category
Gc, Dc	Equipment protection level, normal level of safety, analogous to the
	equipment category
Х	For a safe use of the couplings particular conditions apply

If the symbol was punched in addition to marking , the coupling component was supplied by KTR as an unbored or pilot bored version (see chapter 4.3 of the present operating/assembly instructions).

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	



Advice and instructions regarding the use in **Ex** potentially explosive atmospheres

# 10.5 EU Certificate of conformity

		eclaration of Confor Certificate of Confo	
		2014/34/EU dated 26 February 20 ppted for its implementation	<u>14</u>
The manufa	cturer - KTR Syster	ms GmbH, Carl-Zeiss-Str. 25, D-4	8432 Rheine - states that the
	ROTE	X [®] GS backlash-free shaf	t couplings
components and health s	corresponding to a pecifications according to the configuration of conformity is	scribed in these assembly instruct article 2, 1. of directive 2014/34/El ding to enclosure II of directive 20 s issued under the sole responsib	U and comply with the general safety 014/34/EU.
The coupling	g described in here	complies with the specifications of	of the following standards/rules:
		EN ISO 80079-36:2016-12 EN ISO 80079-37:2016-12 EN ISO/IEC 80079-38:2017-10 IEC/TS 60079-32-1:2020-01-2	
The ROTEX	[®] GS is in accordar	nce with the specifications of direc	ctive 2014/34/EU.
		of directive 2014/34/EU the techr tion certificate IBExU03ATEXB00	nical documentation is deposited with 02_05 X):
		IBExU Institut für Sicherheitstechnik G Identification number: 0637 Fuchsmühlenweg 7	GmbH
		09599 Freiberg	
Rheine,	2022-07-06	i.v.	i.V. Deinter
Place	Date	Reinhard Wibbeling	Johannes Deister

Johannes Deister **Product Manager** 

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	

Engineering/R&D



Advice and instructions regarding the use in **CX** potentially explosive atmospheres

## 10.6 UK Declaration of conformity

# UK Declaration of Conformity resp. Certificate of Conformity

corresponding to UK directive SI 2016 No. 1107 dated 26 February 2014 and to the legal provisions adopted for its implementation

The manufacturer - KTR Systems GmbH, Carl-Zeiss-Str. 25, D-48432 Rheine - states that the

# ROTEX[®] GS backlash-free shaft couplings

in an explosion-proof design described in these assembly instructions are equipment resp. components corresponding to directive SI 2016 No. 1107 and comply with the general safety and health requirements according to directive SI 2016 No. 1107. This declaration of conformity resp. certificate of conformity is issued under the sole responsibility of the manufacturer KTR Systems GmbH.

The coupling described in here complies with the specifications of the following standards/rules:

EN ISO 80079-36:2016-12 EN ISO 80079-37:2016-12 EN ISO/IEC 80079-38:2017-10 IEC/TS 60079-32-1:2020-01-24

The ROTEX[®] GS is in accordance with the specifications respectively the applicable specifications of directive SI 2016 No. 1107.

According to directive SI 2016 No. 1107 the technical documentation is deposited with the notified body:

Eurofins CML Identification number: 2503

Rheine, Place 2022-07-06 Date i. V. Reinhard Wibbeling Engineering/R&D

2. Neinter

i. V. // Johannes Deister Product Manager

Please observe protection	Drawn:	2022-07-06 Pz/Wb	Replacing:	KTR-N dated 2020-02-10
note ISO 16016.	Verified:	2022-08-05 Pz	Replaced by:	